

Firestone



APPLICATION GUIDE

VALID FOR 2021 & OLDER VEHICLES



riderite.com

Firestone

Firestone Industrial Products

TABLE OF CONTENTS

The Firestone Difference	2
Air Helper Springs	3
Ride-Rite™ Wireless App Kit	4
Air Command™ Systems	5-6
All-In-One Kit Applications	7-8
Lifted Applications	9-10
Applications	11-26
Service Air Springs & Tech Specs	27-30
RED Service Air Springs & Tech Specs	31-32
Coil-Rite™ Service Parts & Tech Specs	33-34
Air Accessory Systems	35
Air Accessory Mounting Kits	36
Control Panels	37
Air Compressors	38
Service Parts	39-41
Air Tanks	42-43
Sales Materials	44
Warranty Guide	45-48
Technical Tips	49
Frequently Asked Questions	50



For more information:

www.riderite.com



BUILT FOR THE PROS

THE FIRESTONE ADVANTAGE

Firestone Ride-Rite™ air springs provide the ultimate comfort, confidence, and control.

ABSORBS EXTREME SHOCK

Capable of withstanding sudden left-to-right or side-to-side changes in suspension travel

AIR-ONLY DESIGN


Smooth ride and high performance, riding on a cushion of air

WORRY-FREE MAINTENANCE

Durable bellow won't rip or pull apart when suspended on a lift

LONG PRODUCT LIFE

Built to last using commercial-grade steel plates with rolled crimp design for a long life under your vehicle

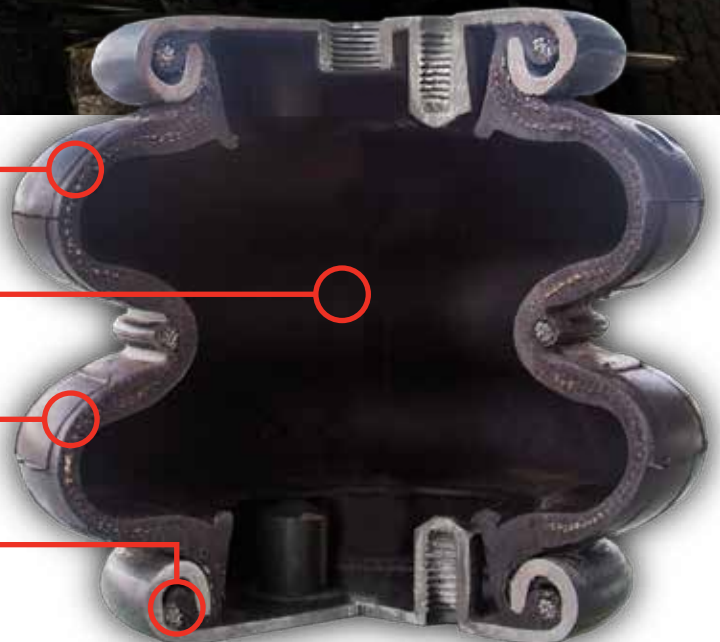

THE ORIGINAL

Precision-engineered leveling

Firestone air springs are specifically designed to fit on your vehicle and provide an array of benefits. Use the application guide beginning on page 11 to determine which air spring product is designed for your vehicle. Enjoy easy installation and the smooth ride, improved stability, and safer load-carrying capacity offered by the original air spring.



- o Firestone's most popular and comprehensive air spring line
- o Maximizes the vehicle's safe load-carrying capacity, stability, ride quality, and brake effectiveness
- o Most kits are No-Drill systems that easily install in 1-2 hours
- o Supports up to 5,000 lbs. per set*



- o Control the air pressure in the air springs for varying loads and road conditions
- o Spring performance can be altered as easily as inflating a tire
- o Made of durable and elastic polyurethane
- o Carrying capacity up to 2,000 lbs and 70 PSIG* per set (on select kits)
- o Designed to work in temperatures between -40°F (-40°C) and 180°F (82°C)

*DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR)

THE LATEST PRODUCTS

PUT THE POWER IN YOUR HANDS



RIDE-RITE™ WIRELESS APP KIT - 2610

See air accessories chart on page 6

Control your air springs with your phone.

- EASY INSTALLATION
- FREE AIR PRESSURE CONTROL APP FOR IOS AND ANDROID
- MOUNT-ANYWHERE COMPRESSOR AND ECU
- 2 MEMORY PRESETS
- MANUAL INFLATION OPTION
- SEE PAGE 6 FOR AIR COMMAND™ PRODUCTS



INSTANT AIR SPRING CONTROL




Air Command™ brings the controls to your fingertips

Firestone Air Command systems provide an instant air source for air suspension products. Adjust the ride for various load and road conditions with a flip of a switch, a click on a remote, or a tap on your phone. Individual air accessory components are also available, including compressors, air tanks, and mounting solutions.

Which Air Command™ system is best for you?

Determine which power level is best for your use, then select the control system for the corresponding kit number.

1. POWER			
Kit grade choices	STANDARD DUTY	HEAVY DUTY	EXTREME DUTY
Kit description	Best for moderate usage, including towing boats, trailers 20' or smaller, and medium loads	Best for 8-lug trucks, trailers larger than 20', slide-in campers, and heavy loads	Best for Heavy Duty uses, plus off-road tire or truck tire inflation. Includes 2-gallon air tank and 25' air hose
Air spring types	Ride-Rite™ & Coil-Rite™	Ride-Rite™ & RED	Ride-Rite™ & RED
Frequency of use and load weight	● ○ ○ ○ ○	● ● ● ○ ○	● ● ● ● ●
Max PSI	100	150	150
Fill time*	0-30 PSI : 17 sec. 0-60 PSI : 42 sec.	0-30 PSI : 14 sec. 0-60 PSI : 35 sec.	0-30 PSI : 7 sec. 0-60 PSI : 18 sec.
Compressor included in kit	 9523	 9499	 9287
Tank & air hose included in kit	<i>Not included</i>	<i>Not included</i>	 9420 2311
2. CONTROL			
 Single-leveling system choices Controls both air springs equally.			
SINGLE ANALOG 	2158 Mounting Plate: 2612	2097 Mounting Plate: 2497	2543 Mounting Plate: 2530
WIRELESS APP† 	2610 Mounting Plate: 2612	<i>Not available</i>	<i>Not available</i>
 Dual-leveling system choices Control each air spring independently or equally.			
DUAL ANALOG 	2178 Mounting Plate: 2612	2219 Mounting Plate: 2497	2549 Mounting Plate: 2530
F3 WIRELESS 	2581 Mounting Plate: 2588	2590 Mounting Plate: 2588	2592 Mounting Plates: 2588 & 2530



Mounting plate kits make your installation a breeze.
See page 36 to match your selected mounting plate number from above.

*For more details on compressor specs, see chart on page 38.

† Note that the 2610 kit cannot be used with a tank or compressor other than 9523.

GET THE COMPLETE PACKAGE




All-In-One kits come with air springs, a compressor, air accessories, and all components for install. Choose F3 Wireless or Analog.

- One part number for easy ordering
- Recommended: No-Drill Air Accessory mounting kit (page 36)

RIDE-RITE™ F3 WIRELESS ALL-IN-ONE KIT

See application guide starting on page 11



Wireless
air control
via remote



"GET SOME AIR" HAS A NEW MEANING



Spacers for your lifted applications

Lift spacers can be used with most Ride-Rite™ air spring kits, but not with Coil-Rite™ kits. The lift spacer needs to match the amount of lift added to the rear of your vehicle. Note that a six-inch lift does not mean you need a six-inch lift spacer!

Most six-inch lifts only have four inches of lift in the rear to level out the truck. This holds true for the shorter lift kits as well. If you are unsure about the spacer needed for your application, visit riderite.com/contact-us for support.


6"
LIFT

≠

6"
SPACER

MEASURE YOUR SPACING

Measure while truck has all four wheels on ground or jack stands

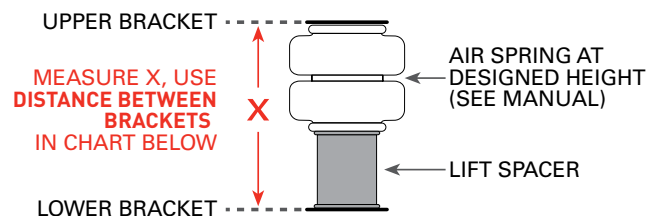

LIFTED APPLICATIONS



LIFT SPACERS*			
	Distance between brackets	Lift spacer height	Lift spacer number
	6.5" - 7.5"	1.25"	2536 (PACKAGES OF 2)
	7.5" - 8.5"	2"	2366 (PACKAGES OF 2)
	8.5" - 9.5"	3"	2367 (PACKAGES OF 2)
	9.5" - 10.5"	4"	2370 (PACKAGES OF 2)
	11.5" - 12.5"	6"	2374 (PACKAGES OF 2)

*May void Firestone warranty if incorrectly installed or wrong spacer is selected.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
											
Acura SUV											
MDX		05-10	4179					2	6020		
Audi Cars											
A3		10-18	4176				Y	1	6027		
Q3		15-16	4176				Y	1	6027		
Buick Cars / CUV / Van											
Century (fwd only)		82-96	-4103-				Y	1	6014		
Electra (not sw)		85-96	4107				Y	1	6021		
LeSabre (not sw) (fwd only)		00-04	4105				Y	1	6013		
LeSabre FWD		86-99	4107				Y	1	6021		
Park Avenue		97-05	4105				Y	1	6013		
Park Avenue (not sw)		85-96	4107				Y	1	6021		
Riviera		95-98	4105				Y	1	6013		
Riviera		79-85	-4106-				Y	1	6015		
Terraza		05-07	4155				Y	1	6020		
Cadillac Cars / SUVs											
Coupe Deville, Fleetwood, Sedan Deville, Touring Sedan (fwd only)		85-93	4107				Y	1	6021		
El Dorado		79-85	-4106-				Y	1	6015		
Escalade (2WD, 4WD) (4 door only)		99-00	2101				Y	2	6781		
Escalade, ESV, EXT (2WD, 4WD)		02-20	4108				Y	1	6003		
Escalade, ESV, EXT (2WD, 4WD) (with Autoride suspension)		15-20	4108				Y	1	6003		
Escalade, ESV, EXT (2WD, 4WD) (with Autoride suspension)		08-14	4186				Y	1	6015		
Seville		80-85	-4106-				Y	1	6015		
Chevrolet Cars											
Aveo		10	-4103-				Y	1	6014		
Camaro, Z-28, IROC-Z		82-02	-4103-				Y	1	6014		
Celebrity		82-90	-4103-				Y	1	6014		
Volt		16	4176				Y	1	6027		
Volt		12-15	4118				Y	1	6118		

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158

Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label

sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
			 Rear Kit	 RED Label	 All-In-One F3 Wireless	 All-In-One Analog	 No Drill	 Time (hours)	 Replacement Air Spring	 Front Kit	 Replacement Air Spring
Chevrolet/GMC Vans											
G1500 (6 lug nuts, GVWR 7200)		03-09	2423					2	6868		
Uplander		05-09	4155				Y	1	6020		
Chevrolet/GMC SUVs											
Avalanche 1500 (2WD, 4WD) (with Autoride suspension)		11-13	4186				Y	1	6015		
Avalanche 1500 (2WD, 4WD)		02-13	4108				Y		6003		
Blazer (2WD only) (full size)		73-91								4100	6100
Envoy (2WD, 4WD) (with rear coil springs)		02-09	4108				Y	1	6003		
Jimmy (2WD only) (full size)		73-91								4100	6100
Suburban 1500 (2WD, 4WD)		07-20	4108				Y	1	6003		
Suburban 1500 (2WD, 4WD) (with Autoride suspension)		15-20	4108				Y	1	6003		
Suburban 1500 (2WD, 4WD) (with Autoride suspension)		08-14	4186				Y	1	6015		
Suburban 1500 (2WD, 4WD)		00-06	4108				Y	1	6003		
Suburban 1500 (2WD, 4WD)		92-99	2101					2	6781		
Suburban 1500 (2WD only)		73-91								4100	6100
Suburban 2500 (2WD, 4WD)		92-99	2101					2	6781		
Suburban 2500 (2WD only)		73-91								4100	6100
Tahoe (2WD, 4WD)		00-20	4108				Y	1	6003		
Tahoe (2WD, 4WD) (with Autoride suspension)		15-20	4108				Y	1	6003		
Tahoe (2WD, 4WD) (with Autoride suspension)		08-14	4186				Y	1	6015		
Police Tahoe (2WD, 4WD)		07-20	4147				Y	1	6024		
Tahoe (2WD, 4WD) (4-door only)		95-99	2101					2	6781		
Trailblazer (2WD, 4WD)		02-09	4108				Y	1	6003		
Yukon 1500 (2WD, 4WD)		07-20	4108				Y	1	6003		
Yukon 1500 (2WD, 4WD) (with Autoride suspension)		15-20	4108				Y	1	6003		
Yukon 1500 (2WD, 4WD) (with Autoride suspension)		08-14	4186				Y	1	6015		
Yukon 1500 (2WD, 4WD)		00-06	4108				Y	1	6003		
Yukon 1500 (2WD, 4WD) (4-door only)		95-99	2101					2	6781		
Yukon 2500 (2WD, 4WD) (4-door only)		95-99	2101					2	6781		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" += 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country

DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
							No Drill	Time (hours)			
Chevrolet / GMC Pickup Trucks											
Colorado, Canyon (2WD, 4WD) (not ZR2)		15-20	2587				Y	1.5	9001		
Colorado, Canyon (2WD, 4WD) (not factory lowered ZQ8)		04-12	2384				Y	1.5	6397		
Chevrolet Silverado / GMC Sierra 1500 Pickup Trucks											
Silverado, Sierra 1500 (2WD, 4WD) (not LD or Limited trucks)	Y	19-20	2609 ##				Y	1	6397		
Silverado, Sierra 1500 (2WD, 4WD) (not High Country and Denali model 15+)		07-18	2430				Y	1	6397		
Silverado Classic, Sierra Classic 1500 (2WD, 4WD)		07	2320 ++					2	9000		
Silverado, Sierra 1500 (2WD, 4WD) (not HD)		99-06	2320 ++					2	9000		
Silverado, Sierra 1500HD (2WD, 4WD) (not Quad-Steer)	Y	05-06	2190					2	6781		
Silverado, Sierra 1500HD (2WD, 4WD) (not Quad-Steer)	Y	01-03	2190					2	6781		
C & K1500 (2WD, 4WD)		88-98	2025					2	6781		
C & R 10, 1500 (2WD only)		73-87	2071 *					2	6781	4100	6100
Chevrolet Silverado / GMC Sierra 2500 Pickup Trucks											
Silverado, Sierra 2500HD (2WD, 4WD)	Y	20	2613	2709	2824	2825	Y	1.5 2.5 A/O	6401 8401		
Silverado, Sierra 2500HD (2WD, 4WD)	Y	11-19	2596	2702	2806	2807	Y	1.5 2.5 A/O	6401 8401		
Silverado, Sierra 2500HD (2WD, 4WD)	Y	01-10	2250	2700	2808	2809	Y	1.5 2.5 A/O	6781 8781		
Silverado, Sierra C2500 (2WD only) (not HD)	Y	99-05	2190					2	6781		
Silverado, Sierra C2500 (4WD only) (not HD)	Y	99-05	2190					2	6781		
C & K2500 (2WD, 4WD) (with rear drum brakes)	Y	99-00	2025					2	6781		
C & K2500 (2WD, 4WD)	Y	88-98	2025					2	6781		
C & R20, C & R2500 (2WD only)		73-87	2071 *					2	6781	4100	6100

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158

Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label

sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
			 Rear Kit	 RED Label	 All-In-One F3 Wireless	 All-In-One Analog	No Drill	Time (hours)	 Replacement Air Spring	 Front Kit	 Replacement Air Spring
Chevrolet Silverado / GMC Sierra 3500 Pickup Trucks											
Silverado, Sierra 3500HD (2WD, 4WD)	Y	20	2613	2709	2824	2825	Y	1.5 2.5 A/O	6401 8401		
Silverado, Sierra 3500HD (2WD, 4WD)	Y	11-19	2596	2702	2806	2807	Y	1.5 2.5 A/O	6401 8401		
Silverado, Sierra 3500HD (2WD,4WD)	Y	01-10	2250	2700	2808	2809	Y	1.5 2.5 A/O	6781 8781		
C & K3500 (2WD, 4WD)	Y	88-00	2025					2	6781		
C & R30, C & R3500 (2WD only)		73-87	2071 *					2	6781		
C30 (2WD only)		67-87	2071 *					2	6781	4100	6100
Chevrolet / GMC Commercial Vehicle (vehicle without factory bed)											
C2500HD, C3500HD (2WD, 4WD) (cab & chassis)		01-10	2249				Y	1.5	6781		
Chevrolet /GMC Motorhomes Class “C” Vans											
G3500, G4500 (with dual rear wheels)		13-19	2557				Y	2	6766		
G30, G3500		70-95								4100	6100
Chevrolet / GMC Motorhomes Class “A” & Step Vans											
GP30 HD (cutaway) (10,500 to 12,300 GVWR)		93-96								4100	6100
GP30 HD (cutaway) (14,500 GVWR)		93-96								4100	6100
P30 (10,500 to 12,800 GVWR) (with jounce bumpers mounted at bottom of frame rails)		93-96								4100	6100
P30 (14,500 to 17,000 GVWR) (with jounce bumpers mounted above leaf springs)		93-99								4100	6100
P30 (with jounce bumpers mounted at bottom of frame rails)		63-92								4100	6100
Chrysler Cars / Vans											
Imperial, New Yorker 5th Ave. Landau and Salon		90-94	4105				Y	1	6013		
Le Baron, GTS, TC by Maserati		82-95	4105				Y	1	6013		
New Yorker		84-89	4105				Y	1	6013		
Town and Country		08-16	4169					1	6013		
Town and Country (sw only)		84-89	4105				Y	1	6013		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" + = 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country

DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
							No Drill	Time (hours)			
Dodge Cars											
400, 600, Lancer, Daytona		82-94	4105				Y	1	6013		
Aries		81-89	4105				Y	1	6013		
Dynasty, Spirit		90-94	4105				Y	1	6013		
Shadow		87-94	4105				Y	1	6013		
Dodge Vans (For Ram vans after 2009, see Ram listing)											
Caravan, Grand Caravan		08-17	4169					1	6013		
Dodge SUV											
Durango (2WD, 4WD)		04-09	4152				Y	1	6009		
Dodge 1500 Pickup Trucks (For Ram trucks after 2009, see Ram listing)											
Ram 1500 (2WD, 4WD)	Y	09	2595				Y	1.5	9047		
Ram 1500 (2WD, 4WD)	Y	09	4185				Y	1	6133		
Ram 1500 (2WD, 4WD)		02-08	2286				Y	1.5	6781		
Ram 1500 Mega Cab (2WD, 4WD)	Y	06-08	2299		2804	2805	Y	1.5 2.5 A/O	6401		
Ram 1500 (2WD, 4WD)		94-01	2071 *					2	6781		
D & W 100, 150, Ram 1500 (2WD, 4WD)		69-93	2071 *					2	6781		
Dodge 2500 Pickup Trucks (For Ram trucks after 2009, see Ram listing)											
Ram 2500 (2WD only)	Y	03-09	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 2500 (4WD only)	Y	03-09	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 2500 (2WD, 4WD)		94-02	2071 *					2	6781		
Ram 2500 (2WD, 4WD) (with contact overload springs)	Y	94-98	2220				Y	2	6781		
D & W 200, 250, Ram 2500 (2WD, 4WD)		69-93	2071 *					2	6781		
Dodge 3500 Pickup Trucks (For Ram trucks after 2009, see Ram listing)											
Ram 3500 (2WD only)	Y	03-09	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 3500 (4WD only)	Y	03-09	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 3500 (2WD, 4WD)		94-02	2071 *					2	6781		
D & W 300, 350, Ram 3500 (2WD, 4WD)		69-93	2071 *					2	6781		

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158

Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label

sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
			 Rear Kit	 RED Label	 All-In-One F3 Wireless	 All-In-One Analog	No Drill	Time (hours)	 Replacement Air Spring	 Front Kit	 Replacement Air Spring
Dodge Commercial Vehicles (vehicles without factory bed) (For Ram trucks after 2009, see Ram listing)											
Ram 3500 HD (2WD, 4WD) (cab & chassis)		07-09	2478 +					2	6781		
Ram 4500, 5500 (2WD, 4WD) (requires 2" clearance above frame) (cab & chassis)		07-09	2404 ***					2	7714		
Ram 2500 (2WD, 4WD) (not dually, with box delete)	Y	04-08	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 3500 (4WD only) (dually only, with box delete)	Y	06-12	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
D3500, W3500 (2WD, 4WD) (cab & chassis)	Y	94-02	2220				Y	2	6781		
Ford Cars											
Country Squire		83-97	4108				Y	1	6003		
Crown Victoria (with rear coil springs)		98-08	4107				Y	1	6021		
Crown Victoria		83-97	4108				Y	1	6003		
Fusion		06-12	4169					1.5	6013		
LTD		83-86	-4103-				Y	1	6014		
Mustang		79-03	-4103-				Y	1	6014		
Taurus (sw only)		86-98	4105				Y	1	6013		
Thunderbird		92-97	4105				Y	1	6013		
Thunderbird		80-88	-4106-				Y	1	6015		
Ford Vans											
Windstar		98-03	-4106-				Y	1	6015		
E150		75-14								4101	6102
E100, E150 (may require tailpipe modification)		75-91	-2032-				Y	1.5	6859	4101	6102
E250		98-14								4101	6102
E250 (may require tailpipe modification)		75-91	-2032-				Y	1.5	6859	4101	6102
E350 (with single rear wheels)		98-14								4101	6102
E350 (may require tailpipe modification)		75-91	-2032-				Y	1.5	6859	4101	6102
Transit 350 (DRW only)		13-20	2603					2	6781		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" + = 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country

DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
							No Drill	Time (hours)			
Ford SUVs											
Bronco (4WD only) (full size)		90-96	2071 *					2	6781	4102	6111
Bronco (2WD, 4WD)		80-90								4102	6111
Excursion (2WD only)		00-06	2255				Y	2	6781		
Excursion (4WD only)		00-06	2251				Y	2	6781		
Expedition (2WD, 4WD) (with rear coil springs)		97-02	4134				Y	1	6022		
Ford Pickup Trucks											
Ranger		19	2614					2	6766		
F100 (2WD, 4WD)		68-79	2071 *					2	6781	4102	6111
Ford F150 Pickup Truck											
F150 (2WD, 4WD) (Not Raptor)		15-19	2582 +				Y	1.5	6781		
F150 (2WD, 4WD) (Not Raptor or FX2)		09-14	2525 +				Y	1.5	6781		
F150 (2WD, 4WD) (with B&W hitch only)	Y	09-14	2542 +				Y	1.5	6781		
F150 Raptor (4WD only)		09-14	2565 +				Y	1.5	9055		
F150 (2WD, 4WD) (not FX2)		04-08	2350 #				Y	1.5	6397		
F150, F150 Heritage (2WD, 4WD)		97-04	2320 ++					2	9000		
F150 (2WD, 4WD)		68-96	2071 *					2	6781	4102	6111
Ford F250 Pickup Truck											
F250 Under 8500 GVWR (2WD, 4WD)		97-03	2320 ++					2	9000		
F250 Under 8500 GVWR (2WD only)		69-96	2071 *					2	6781	4101	6102
F250 Under 8500 GVWR (4WD only)		69-96	2071 *					2	6781		
F250 (2WD only)	Y	17-20	2600 *				Y	1.5	6781		
F250 (2WD only)	Y	11-16	2597	2703	2802	2803	Y	1.5 2.5 AIO	6401 8401	4101	6102
F250 (2WD only)	Y	08-10	2550		2800	2801	Y	1.5 2.5 AIO	6401	4101	6102
F250 (2WD only)	Y	05-07	2398					2	6401	4101	6102
F250 Over 8500 GVWR (2WD only)	Y	99-04	2550		2800	2801	Y	1.5 2.5 AIO	6401	4101	6102
F250 Over 8500 GVWR (2WD only)		84-98	2071 *					2	6781	4101	6102
F250 Over 8500 GVWR (2WD only)		69-83	2071 *					2	6781		

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158


Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label

sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
							No Drill	Time (hours)			
Ford F250 Pickup Truck (continued)											
F250 (4WD only) (not 2020 and up FX4)	Y	17-20	2605	2707	2820	2821	Y	1.5 2.5 A/O	6397 8397	4160	6125
F250 (4WD only)	Y	11-16	2597	2703	2802	2803	Y	2 2.5 A/O	6401 8401	4160	6125
F250 (4WD only)	Y	08-10	2550		2800	2801	Y	1.5 2.5 A/O	6401	4160	6125
F250 (4WD only)	Y	05-07	2400				Y	1.5	6401	4160	6125
F250 Over 8500 GVWR (4WD only)	Y	99-04	2550		2800	2801	Y	1.5 2.5 A/O	6401	2223	6762
F250 Over 8500 GVWR (4WD only)		84-04	2071 *					2	6781	2223	6762
F250 Over 8500 GVWR (4WD only)		69-83	2071 *					2	6781		
Ford F350 Pickup Truck											
F350 (2WD only)	Y	17-20	2600 *				Y	1.5	6781		
F350 (2WD only) (not V10 gas w/extended cab and 8' bed)	Y	11-16	2597	2703	2802	2803	Y	2 2.5 A/O	6401 8401	4101	6102
F350 (2WD only)	Y	08-10	2550		2800	2801	Y	1.5 2.5 A/O	6401	4101	6102
F350 (2WD only)	Y	06-07	2398				Y	1.5	6401	4101	6102
F350 (2WD only)	Y	05	2398				Y	1.5	6401	4160	6125
F350 (2WD only) (not V10 gas w/extended cab and 8' bed)	Y	99-04	2550		2800	2801	Y	1.5 2.5 A/O	6401	4101	6102
F350 (2WD only)		70-98	2071 *					2	6781	4101	6102
F350 (2WD only)		63-69	2071 *					2	6781		
F350 (SRW only) (4WD only) (not 2020 and up FX4)	Y	17-20	2605	2707	2820	2821	Y	1.5 2.5 A/O	6397 8397	4160	6125
F350 (DRW only) (4WD only)	Y	17-20	2604	2708	2822	2823	Y	1.5 2.5 A/O	6397 8397	4160	6125
F350 (4WD only)	Y	11-16	2597	2703	2802	2803	Y	2 2.5 A/O	6401 8401	4160	6125
F350 (4WD only)	Y	08-10	2550		2800	2801	Y	1.5 2.5 A/O	6401	4160	6125
F350 (4WD only)	Y	05-07	2400				Y	1.5	6401	4160	6125
F350 (4WD only)	Y	99-04	2550		2800	2801	Y	1.5 2.5 A/O	6401	2223	6762
F350 (4WD only)		84-98	2071 *					2	6781	2223	6762
F350 (4WD only)		63-83	2071 *					2	6781		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" + = 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country

DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
							No Drill	Time (hours)			
Ford F450 Pickup Truck											
F450 (2WD only)	Y	17-20	2604	2708	2822	2823	Y	1.5 2.5 A/O	6397 8397		
F450 (2WD only)	Y	14-16	2583				Y	1.5	7701	4101	6102
F450 (2WD only)	Y	11-13	2597	2703	2802	2803	Y	2 2.5 A/O	6401 8401	4101	6102
F450 (2WD only)	Y	08-10	2446					2	7701	4101	6102
F450 (4WD only)	Y	17-20	2604	2708	2822	2823	Y	1.5 2.5 A/O	6397 8397	4160	6025
F450 (4WD only)	Y	14-16	2583				Y	1.5	7701	4160	6025
F450 (4WD only)	Y	11-13	2597	2703	2802	2803	Y	2 2.5 A/O	6401 8401	4160	6025
F450 (4WD only)	Y	08-10	2446					2	7701	4160	6025
Ford Commercial Vehicles (vehicles without factory bed)											
E250 (cutaway)		07-08	2061				Y	1.5	6764	4101	6102
E350 (with dual rear wheels)		92-19	2061				Y	1.5	6764	4101	6102
E350 (may require tailpipe modification)		75-91	-2032-				Y	1.5	6859	4101	6102
E450		08-21	2458				Y	1.5	6397	4101	6102
E450		96-07	-2377-				Y	1.5	6397	4101	6102
E450 (requires 2" clearance above frame)		96-21	2153 +					2	6781	4101	6102
F350 (2WD, 4WD) (cab & chassis)		17-20	2176 *					2	6781	4160	6125
F350 (2WD, 4WD) (cab & chassis)		05-08	2176 *					2	6781	4160	6125
F350 (2WD only) (cab & chassis)		99-04	2176 *					2	6781	4101	6102
F350 (4WD only) (cab & chassis)		99-04	2176 *					2	6781	2223	6762
F450 (2WD, 4WD) (cab & chassis)		05-20	2176 *					2	6781	4160	6125
F450 (2WD, 4WD) (cab & chassis)		99-04	2176 *					2	6781		
F550 (2WD, 4WD) (requires 2" clearance above frame) (cab & chassis)		05-20	2404 ***					2	7714	4160	6125
F550 (2WD, 4WD) (requires 2" clearance above frame) (cab & chassis)		99-04	2404 ***					2	7714		
F59		11-12	2170 +					2	6781	2070	0335
Transit 350 (DRW only)		13-20	2603					2	6781		

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158

Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label



sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
			 Rear Kit	 RED Label	 All-In-One F3 Wireless	 All-In-One Analog	 No Drill	 Time (hours)	 Replacement Air Spring	 Front Kit	 Replacement Air Spring
Ford Motorhomes Class "C" Vans											
E350 (with dual rear wheels)		92-19	2061				Y	1.5	6764	4101	6102
E350 (may require tailpipe modification)		75-91	-2032-				Y	1.5	6859	4101	6102
E450		08-21	2458				Y	1.5	6397	4101	6102
E450		96-07	-2377-				Y	1.5	6397	4101	6102
E450 (requires 2" clearance above frame)		96-21	2153 +					2	6781	4101	6102
Transit 350 (DRW only)		13-20	2603					2	6781		
Ford Motorhomes Class "A"											
E33 (with front coil springs)		92-96	2061				Y	1.5	6764	4101	6102
E33 (with front coil springs)		86-91	-2032-				Y	1.5	6859	4101	6102
F53 (16,000 to 22,000 GVWR) (not Thor m/h for rear kit)		08-12	2170 +					2	6781		
F53 (16,000 to 22,000 GVWR) (not Thor m/h for rear kit)		99-07	2170 +					2	6781	2070	0335
F53		90-98								2070	6859
Freightliner / Oshkosh / John Deere Motorhomes Class "A"											
"M" and "X" chassis (not XC21) (below 22,000 GVWR)		94-98	2071 *					2	6781		
Honda Vans / SUVs											
Odyssey		05-10	4179					1.5	6020		
Odyssey		99-04	4138					1.5	6017		
Passport (2WD, 4WD)		98-02	4136				Y	1	6014		
Pilot		05-10	4179					1.5	6020		
Pilot		03-04	4138				Y	1	6017		
HUMMER SUVs											
H2, H2 SUT (with rear coil springs)		03-09	4108				Y	1	6003		
Hyundai Car / Van / SUVs											
Accent		07-12	4136				Y	1	6014		
Entourage		07-09	4138					1.5	6017		
Santa Fe, Santa Fe Sport		07-16	4170					1.5	6117		
Tucson		16-20	4176				Y	1	6027		
Veracruz		07-12	4170					1	6117		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" + = 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country

DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
											
Infiniti SUVs											
FX45 (2WD, 4WD)		03-08	4118				Y	1	6118		
QX56		05-09	4150				Y	1	6023		
QX80		16-19	4164				Y	1	6009		
Isuzu SUVs / Truck											
290i, 370i (2WD, 4WD)		06-09	2384				Y	1.5	6397		
Amigo		98-00	4103				Y	1	6014		
Axiom		02-03	4136				Y	1	6014		
Rodeo, Rodeo Sport		98-04	4136				Y	1	6014		
Trooper		92-97	4106				Y	1	6015		
Jeep SUVs											
Commander (2WD, 4WD)		06-10	4157				Y	1	6005		
Grand Cherokee (2WD, 4WD)		05-10	4157					1.5	6005		
Grand Cherokee (2WD, 4WD) (not "up country")		92-98	4118				Y	1	6118		
Grand Wagoneer (2WD, 4WD)		92-98	4118				Y	1	6118		
Liberty (2WD, 4WD)		08-12	4170					1.5	6017		
Summit (sw only)		92-93	4105				Y	1	6013		
Wrangler (except Rubicon) (2WD, 4WD)		07-17	4173				Y	1	6106		
Wrangler Unlimited (except Rubicon) (2WD, 4WD)		07-17	4173				Y	1	6106		
Wrangler (2WD, 4WD)		97-06	4157					1.5	6005		
Kia Van / SUV											
Sportage		16-20	4176					1	6027		
Sedona		06-16	4138					1.5	6017		
Land Rover SUVs											
Defender 90		90-97	-4121-				Y	1	6003		
Discovery (with rear coil springs)		90-04	-4121-				Y	1	6003		
Range Rover		90-96	-4121-				Y	1	6003		

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158

Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label

sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
			 Rear Kit	 RED Label	 All-In-One F3 Wireless	 All-In-One Analog	 No Drill	 Time (hours)	 Replacement Air Spring	 Front Kit	 Replacement Air Spring
Lexus SUVs											
LX 450		96-98	4124				Y	1	6007		
LX 470		99-07	4124				Y	1	6007		
LX 570		13-18	4135				Y	2	6024		
LX 570		09-12	4164				Y	2	6009		
Lincoln Cars / CUVs / Truck											
Continental (with rear coil springs)		82-88	-4106-				Y	1	6015		
Mark IV (with rear coil springs)		84-87	-4106-				Y	1	6015		
Mark LT (2WD, 4WD)		05-08	2350				Y	1.5	6397		
MKC		15-19	4175				Y	1	6026		
MKZ		11-19	4170				Y	1	6017		
Towncar		80-89	4108				Y	1	6003		
Mazda Van											
MPV		96-98	4105				Y	1	6013		
Mercury Cars											
Capri		79-86	-4103-				Y	1	6014		
Colony Park		83-97	4108				Y	1	6003		
Cougar		92-97	4105				Y	1	6013		
Cougar		80-88	-4106-				Y	1	6015		
Grand Marquis		98-08	4107				Y	1	6021		
Grand Marquis		83-97	4108				Y	1	6003		
Marquis		83-86	-4103-				Y	1	6014		
Sable (sw only)		86-98	4105				Y	1	6013		
Mitsubishi SUVs											
Expo (2WD, 4WD)		92-93	4105				Y	1	6013		
Outlander		12	4182				Y	1	6026		
Outlander		07-09	4182				Y	1	6026		
Nissan Cars											
Altima		05-15	4105				Y	1	6013		
Maxima		16-17	4105				Y	1	6013		
Maxima		05-08	4105				Y	1	6013		
Nissan Van											
Quest		04-09	4118				Y	1	6118		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" += 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country

DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
							No Drill	Time (hours)			
Nissan SUVs											
Armada (2WD, 4WD)		06-19	4150				Y	1	6023		
Murano (2WD, 4WD)		16-18	4118				Y	1	6118		
Murano (2WD, 4WD)		15	-4197-				Y	1	6124		
Murano (2WD, 4WD)		03-08	4118				Y	1	6018		
Pathfinder (2WD, 4WD)		13-19	4118				Y	1	6018		
Pathfinder Armada (2WD, 4WD)		04-05	4150				Y	1	6023		
Pathfinder (2WD, 4WD)		87-95	-4106-				Y	1	6015		
Rogue (2WD, 4WD)		14-19	4175				Y	1	6026		
Xterra (2WD, 4WD)		05-15	2409				Y	1.5	9002		
Nissan Pickup Trucks											
Frontier (2WD, 4WD)		05-19	2558				Y	1.5	6766		
Titan XD	Y	16-20	2594				Y	1.5	6781		
Titan (2WD, 4WD)		04-15	2355				Y	1.5	6781		
Oldsmobile Cars / SUV											
Aurora		95-04	4105				Y	1	6013		
Bravada (2WD, 4WD) (with rear coil springs)		02-05	-4106-				Y	1	6015		
Cutlass Cierra		82-96	-4103-				Y	1	6014		
Cutlass Cruiser (sw only) (fwd only)		84-95	-4103-				Y	1	6014		
Delta 88, 98 (fwd only)		85-99	4107				Y	1	6021		
LSS		96-01	4107				Y	1	6021		
Toronado		79-85	-4106-				Y	1	6015		
Plymouth Cars											
Acclaim		89-95	4105				Y	1	6013		
Caravelle		85-88	4105				Y	1	6013		
Reliant		81-94	4105				Y	1	6013		
Sundance		87-93	4105				Y	1	6013		
Pontiac Cars											
6000		82-91	-4103-				Y	1	6014		
Bonneville (fwd only)		00-05	4105				Y	1	6013		
Bonneville (fwd only)		87-99	4107				Y	1	6021		
Firebird, Trans Am		82-02	-4103-				Y	1	6014		

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158

Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label



sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
			 Rear Kit	 RED Label	 All-In-One F3 Wireless	 All-In-One Analog	No Drill	Time (hours)	 Replacement Air Spring	 Front Kit	 Replacement Air Spring
Ram Vans (For Dodge vans before 2010, see Dodge listing)											
Caravan, Grand Caravan		08-16	4169					1	6013		
Ram 1500 Pickup Truck (For Dodge trucks before 2010, see Dodge listing)											
Ram 1500 (2WD, 4WD) (not Power Ram or Rebel)	Y	10-20	2595				Y	2	9047		
Ram 1500 (2WD, 4WD) (not Power Ram or Rebel)	Y	20	4130				Y	1	6134		
Ram 1500 (2WD, 4WD) (not Power Ram or Rebel)	Y	10-18	4185				Y	1	6133		
Ram 2500 Pickup Truck (For Dodge trucks before 2010, see Dodge listing)											
Ram 2500 (2WD, 4WD)	Y	14-20	2598	2706			Y	1.5	6873 8873	4193	6103
Ram 2500 (2WD, 4WD)	Y	13	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 2500 (2WD, 4WD)	Y	10-12	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 3500 Pickup Truck (For Dodge trucks before 2010, see Dodge listing)											
Ram 3500 (2WD only) (not factory air assist)	Y	19	2616				Y	1.5	6401	4193	6103
Ram 3500 (4WD only) (not factory air assist)	Y	19	2615	2710			Y	1.5	6401 8401	4193	6103
Ram 3500 (2WD only) (not factory air assist)	Y	14-18	2579				Y	1.5	6401	4193	6103
Ram 3500 (4WD only) (not factory air assist)	Y	14-18	2560	2705			Y	1.5	6401 8401	4193	6103
Ram 3500 (2WD, 4WD)	Y	10-12	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram Commercial Vehicles (vehicles without factory bed) (For Dodge trucks before 2010, see Dodge listing)											
Ram 3500 HD (2WD, 4WD) (cab & chassis)		07-19	2478 +					2	6781		
Ram 4500, 5500 (2WD, 4WD) (requires 2" clearance above frame) (cab & chassis)		07-19	2404 ***					2	7714		
Ram 2500 (2WD, 4WD) (not dually, with box delete)	Y	04-08	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
Ram 3500 (4WD only) (dually only, with box delete)	Y	06-12	2299	2701	2804	2805	Y	1.5 2.5 A/O	6401 8401		
D3500, W3500 (2WD, 4WD) (cab & chassis)	Y	94-02	2220				Y	2	6781		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" + = 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country

DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

APPLICATION GUIDE

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
											
Saturn Van											
Relay		05-07	4155				Y	1	6020		
Scion Cars											
xA		04-07	4136				Y	1	6014		
xB		08-16	4136				Y	1	6014		
Sterling Commercial Vehicle (vehicle without factory bed)											
Bullet (2WD, 4WD) (cab & chassis)		08-09	2478 +					2	6781		
Toyota Cars											
ECHO		01-05	4118				Y	1	6118		
Prius		10-17	4136				Y	1	6014		
Yaris		07-16	4136				Y	1	6014		
Toyota Vans											
Sienna (not AWD)		04-20	4155				Y	1	6020		
Sienna		98-03	4118				Y	1	6118		
Toyota SUVs											
RAV4 (2WD, 4WD)		07-18	4174				Y	1	6028		
FJ Cruiser		07-14	4135				Y	2	6024		
4Runner		98-20	4135				Y	2	6024		
Sequoia (with rear coil springs) (Not TRD Pro)		17-20	4124				Y	1	6007		
Sequoia (with rear coil springs)		08-16	4164				Y	1	6009		
Sequoia		01-07	4124				Y	1	6007		
Land Cruiser		08-20	4164				Y	2	6009		
Land Cruiser		91-07	4124				Y	1	6007		
Toyota Pickup Trucks											
Tacoma (2WD only, axle above leaf springs)		05-20	2410				Y	1.5	6762		
Tacoma Prerunner (2WD only, axle below leaf springs)		05-20	2407				Y	1.5	6766		
Tacoma Prerunner (2WD only, axle below leaf springs)		95-04	2304 #					2	6781		
Tacoma (4WD only)		05-20	2407				Y	1.5	6766		

UPGRADE YOUR SET UP

see products on page 6

App



2610

Wireless



2581

Single Analog



2158


Dual Analog



2178

■ = Ride-Rite™ ■ = Coil-Rite™ ■ = RED Label

sw = Station Wagon fwd = Front Wheel Drive rwd = Rear Wheel Drive Y = Yes

Make/Model	In-bed Hitch Compatible	Year	AIR LEVELING REAR							LEVELING FRONT	
			 Rear Kit	 RED Label	 All-In-One F3 Wireless	 All-In-One Analog	 No Drill	 Time (hours)	 Replacement Air Spring	 Front Kit	 Replacement Air Spring
Toyota Pickup Trucks (continued)											
Tacoma (4WD only)		95-04	2304 #					2	6781		
Tundra (2WD, 4WD), TRD	Y	07-20	2445		2810	2811	Y	1.5 2.5 AIO	6410		
Tundra TRD (2WD only)	Y	00-06	2245					2	6781		
Tundra (4WD only)	Y	00-06	2245					2	6781		
Volkswagen Cars											
CC		09-18	4176				Y	1	6027		
Beetle (not turbo)		12-19	4176				Y	1	6027		
Beetle Turbo		12-19	4175				Y	1	6026		
Eos		07-16	4176				Y	1	6027		
Golf		11-19	4176				Y	1	6027		
Golf GTI		07-19	4176				Y	1	6027		
Golf TDI		11-18	4176				Y	1	6027		
Golf Sport Wagen		16-19	4176				Y	1	6027		
Jetta		12-19	4176				Y	1	6027		
Jetta (not TDI)		07-10	4175				Y	1	6026		
Jetta Sport Wagen		12-13	4176				Y	1	6027		
Jetta Sport Wagen		09-10	4176				Y	1	6027		
Passat		12-19	4176				Y	1	6027		
Passat (not TDI)		98-06	4105				Y	1	6013		
Passat Wagen		07-09	4175				Y	1	6026		
Volkswagen Van											
Routan		09-12	4169					1.5	6013		
Volkswagen SUVs											
Atlas		18-19	4175				Y	1	6026		
Tiguan		09-19	4176				Y	1	6027		

Minimum tire to frame clearance requirements (check both sides): * = 7.50" ** = 3.00" *** = 9.50" + = 8.00" ++ = 6.00" +++ = 6.50"
 -0000- While supplies last # = Use spacer kit 2366 with lifted models ## = Use spacer kit 2366 with Z71 with Trail Boss and High Country




DO NOT EXCEED THE VEHICLE'S RECOMMENDED GROSS VEHICLE WEIGHT RATING (GVWR).
 Designed for stock vehicles. Cannot guarantee all fitments and compatibility with all aftermarket products.

TOW LIKE A PRO



Standard air springs – up to 100 PSI







Ride-Rite is the original air spring provider, offering a wide variety of load-leveling solutions. Spring types include double convoluted, reversible sleeve, and tapered sleeve. Use this section to determine replacement air springs or the right air spring for your custom build.

268C  Compressed Height 2.80" Extended Height 7.00" Ride Height 4.50" - 5.50" Max. Diameter 6.40" 1,600 lbs. per air spring*	6764 	6762 	6766 
--	--	---	--

*Load is nominal @ 100 PSI. Load will vary with height & pressure. Values shown are at ride height.










SERVICE AIR SPRINGS & TECH SPECS



267C 1.5  Compressed Height 2.80" Extended Height 8.30" Ride Height 5.50" - 6.50" Max. Diameter 6.60" 2,400 lbs. per air spring*	6397 	6410 	6781 
	6782 	6784 	7882 








*Load is nominal @ 100 PSI. Load will vary with height & pressure. Values shown are at ride height.

SERVICE AIR SPRINGS & TECH SPECS

224C  Compressed Height 3.00" Extended Height 8.91" Ride Height 5.50" - 7.00" Max. Diameter 7.52 2,500 lbs. per air spring*	0335 	6401 	6873 
26C  Compressed Height 2.80" Extended Height 7.00" Ride Height 4.50" - 5.50" Max. Diameter 6.40" 2,800 lbs. per air spring*	7714 	7325 	7701 
110/70  Max. Diameter 5.70" 1,500 lbs. per air spring*	9000  Compressed Height 6.25" Extended Height 10.25" Ride Height 8.25"	9001  Compressed Height 4.37" Extended Height 8.37" Ride Height 6.38"	9002  Compressed Height 5.25" Extended Height 9.25" Ride Height 7.25"

*Load is nominal @ 100 PSI. Load will vary with height & pressure. Values shown are at ride height.

SERVICE AIR SPRINGS & TECH SPECS

140/95  Max. Diameter 6.44" 1,500 lbs. per air spring*	9047  Compressed Height 8.00" Extended Height 17.80" Ride Height 11.34"	9055  Compressed Height 6.50" Extended Height 13.50" Ride Height 8.90"	
1T14C1  3,200 lbs. per air spring*	2107  Compressed Height 4.25" Extended Height 13.60" Ride Height 9.80" Max. Diameter 9.10"	1T14C3  3,200 lbs. per air spring*	5405  Compressed Height 5.80" Extended Height 15.75" Ride Height 10.50" Max. Diameter 9.10"
1T14C3  3,200 lbs. per air spring*	5294  Ride Height 6.00" Maximum Diameter 9.20"	5295  Ride Height 6.70" Maximum Diameter 9.20"	2093  Ride Height 7.75" Maximum Diameter 9.20"

*Load is nominal @ 100 PSI. Load will vary with height & pressure. Values shown are at ride height.



FOR THOSE WHO DEMAND MORE



**RIDE-RITE™
EXTREME
DUTY**

RED Label™ Extreme Duty air springs – up to 150 PSI per air spring





Firestone continues to raise the bar on high pressure and high-quality air springs with our RED Label™ edition. The air spring operates up to 150 PSI and has a test pressure of 400 PSI. **The RED Label™ parts are not intended to supplement the standard air springs in the standard Ride-Rite™ kits. The RED Label™ parts are intended for use with RED Label™ kits or on custom applications only.**

224C  Compressed Height 3.00" Extended Height 8.91" Ride Height 5.50" - 7.00" Max. Diameter 7.52" 3,750 lbs. per air spring*	8401  ALIGNMENT PIN 3/4"-16 1/4 NPT COMBO STUD 3/8" - 16 x 5/8" BLINDNUT	8873  3/8"-16 x 3/4" STUDS 1/4 NPT 2.75" 3/8" - 16 x 5/8" BLINDNUT
--	--	--

*Load is nominal @ 150 PSI. Load will vary with height & pressure. Values shown are at ride height.

RED LABEL™ SERVICE AIR SPRINGS & TECH SPECS



267C 1.5  Compressed Height 2.80" Extended Height 8.30" Ride Height 5.50" - 6.50" Max. Diameter 6.60" 2,800 lbs. per air spring*	7671 	7703 	8397 
	8781 		




*Load is nominal @ 150 PSI. Load will vary with height & pressure. Values shown are at ride height.

THE NEXT LEVEL FOR COIL SPRINGS



Service parts and tech specs


Coil-Rite air helper springs are designed to fit inside existing coil springs to create a variable spring rate for a variety of cars, minivans, light trucks, RVs and SUVs. Please note that items labeled with an * are available in kit form only.

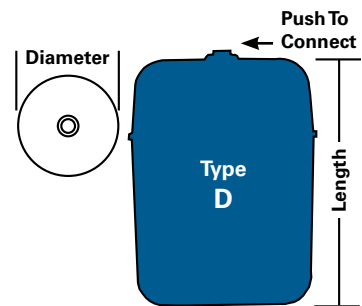

COIL-RITE™ SERVICE PARTS & TECH SPECS



Coil-Rite™ spring	Diameter	Length	Type
6003	4.75"	10.00"	D
6005*	5.50"	5.00"	D
6006*	5.50"	7.00"	D
6007*	5.50"	8.00"	D
6009*	5.50"	10.00"	D
6013*	4.00"	5.00"	D
6014*	4.00"	8.00"	D
6015*	4.00"	9.00"	D
6017*	4.75"	4.00"	D
6018*	4.00"	7.00"	D
6020*	4.75"	6.50"	D
6021*	4.75"	9.00"	D
6023*	4.75"	12.00"	D
6024*	4.75"	7.50"	D
6026*	3.56"	8.75"	D
6027	3.56"	7.00"	D
6028*	4.00"	6.00"	D
6100	3.56"	10.50"	A
6102*	4.00"	11.00"	B
6103*	4.75"	10.00"	E
6106*	5.50"	7.00"	E
6111*	4.00"	8.00"	E
6118*	4.00"	7.00"	E
6125*	4.00"	11.00"	E
6133	4.38"	11.00"	E
6134	5.00"	11.00"	E



*Available in kit form only.

AIR ACCESSORY SYSTEMS


Air supply kits

On-board air source for inflating air springs, tires, rafts, and other pneumatic components. Kits include a compressor, an air tank, and a 25 ft. extension hose.

AIR SUPPLY KITS			
Kit number	Air compressor	Air tank	Hose
2047	0-30psi/14sec 0-60psi/35sec  9499	1/2 Gallon Tank  9124	25' Airhose  9006
2239	0-30psi/14sec 0-60psi/35sec  9499	3 Gallon Tank  9127	25' Airhose with Gauge  2311




Height control valve kits

Automatically control the air spring height. Choose single or dual height leveling. **Requires Air Command™ or Air Supply system.** Kit includes installation hardware.

HEIGHT CONTROL VALVE KITS		
Kit number	Single or dual-leveling	Valve(s)
2186	Single-leveling 	1/8" NPT Ports 
2017	Dual-leveling 	1/8" NPT Ports 

Mounting solutions

Firestone's Air Accessory mounting kits allow pre-assembly of the entire air accessory system, or simply a compressor and/or tank. The mounting plate with attached accessories can then be easily attached to the frame—without drilling—using the provided bail clamps.

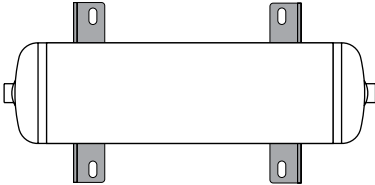INSTALLATION EXAMPLES USING AIR ACCESSORY MOUNTING KITS		
		
AIR COMPRESSOR	AIR TANK	AIR COMMAND™ (Air Compressor and ECU)

AIR ACCESSORY MOUNTING KITS			
Kit number	Used to mount	Kit components	Works with these kits
2496	Air Tanks		All Firestone tanks except 9166
2497	Compressors		For use with All-In-One Analog kits and kits below
			2097 9284 2219 9287 2538 9377 9499
2530	Air Tank and Compressor		2047 2266 2168 2543 2198 2549 2232 2591* 2239 2592*
2588	Air Command™ kits		For use with All-In-One Wireless kits and kits below
			2581 2591* 2589 2592* 2590
2612	Compressor		2158 2610 2178 9235 2538

*For 2591 Standard 2 Remote Air Command, use the 2588 and 2496.
For 2592 Standard 3 Remote Air Command, use the 2588 and 2530.

CONTROL PANELS

Control panel service parts

Add control panels to existing air supply setups to offer air pressure control at the flip of a switch. See important note below about electric and pneumatic options.

METAL CONTROL PANELS						
Single control			Dual control			Monitoring only
						
4.38" x 2.75"			5.75" x 2.75"			3" x 2.75"
Pneumatic		Replacement gauge (2.03" dia.)	Pneumatic		Replacement gauge (2.07" dia.)	Monitoring gauge
White	2225	9181	White	2241	9201	White 2196
Black	2149		Black	2145		
Electric		Replacement gauge (2.03" dia.)	Electric		Replacement gauge (2.07" dia.)	
White	2229	9181	White	2260	9201	
Black	2191					

PLASTIC CONTROL PANELS				
Single control			Dual control	
				
5.25" x 2.73"			6.50" x 2.9"	
Pneumatic		Replacement gauge	Pneumatic	Replacement gauge
White	2570	9181	White	2574
				9201
Electric		Replacement gauge	Electric	Replacement gauge
White	2572	9181	White	2576
				9201

REPLACEMENT SWITCH - ALL CONTROL PANELS	
Pneumatic	9074 - With air tank
Electric	9039 - No air tank

How do I know if I need a pneumatic or an electric control panel?

- Pneumatic control panels are used in systems that utilize tanks and pull air from the tank
- Electric control panels activate the compressor directly and do NOT require a tank

What is the difference between single and dual control panels?

- Single control panels inflate and deflate one pair of air springs
- Dual control panels inflate and deflate two individual air springs or two pairs

Air compressors

Firestone's air compressors are included in all Air Command™ systems, though they may be purchased separately. All Firestone compressors are direct drive compressors (no oil or belts), so the compressors can be mounted in any position, including upside down. Compressors should be mounted in a clean air location. Mounting holes are 3/16".

AIR COMPRESSORS											
9523				9499				9287			
											
Compressor dimensions		Drill hole dimensions		Compressor dimensions		Drill hole dimensions		Compressor dimensions		Drill hole dimensions	
Length	7.63"	Length	5.50"	Length	8.00"	Length	7.19"	Length	11.24"	Length	8.31"
Width	2.11"	Width	1.41"	Width	3.95"	Width	3.31"	Width	3.94"	Width	3.31"
Height	4.31"			Height	6.30"			Height	6.85"		
9164				DO NOT SUBMERGE The compressors are designed to withstand the normal driving conditions of debris and moisture. Care should be taken that the compressors are not submerged into water.							
											
Compressor dimensions											
Length	12.54"										
Width	5.65"										
Height	8.86"										

Air compressors	Part no.	Max. air pressure	Air tank use (up to gal.)	Duty cycle†	Max. AMP draw	0 - 30 PSI*	0-60 PSI*	Wty** (yr)	Repl. filter	CFM @ 100 PSI*
Standard Duty	9523	120 PSI (8.3 BAR)	n/a	9%	13 AMPS	17 sec.	42 sec.	1	—	.32
Heavy Duty	9499	150 PSI (10.4 BAR)	3	30%	13 AMPS	14 sec.	35 sec.	2	—	.40
Extreme Duty	9287	150 PSI (10.4 BAR)	6	100%	23 AMPS	7 sec.	18 sec.	2	9350	.94

*Indicates flow rate - how long it takes to fill a 1/2 gallon air tank.

** See product-specific warranty guidelines for more information regarding warrantable manufacturing defects.

†Duty cycle: time compressor is on.

Find parts and tools

Service parts include air fittings, switches, valves, and more. Some common parts include bulk bags to give professional installers the parts they need, when they need them.


Name	Part	Description	Quantity
 Inflation valve	3467	1/4" tubing	RETAIL PACK OF 2
	3457	1/4" tubing	BULK BAG OF 6
	3032	1/4" tubing	BULK BAG OF 25
 Male connector	3465	1/4" tubing - 1/8 NPT	RETAIL PACK OF 2
	3463	1/4" tubing - 1/4 NPT	
	3454	1/4" tubing - 1/8 NPT	BULK BAG OF 6
	3455	1/4" tubing - 1/4 NPT	
	3046	1/4" tubing - 1/4 NPT	BULK BAG OF 25
 Male elbow	3462	1/4" tubing - 1/4 NPT	RETAIL PACK OF 2
	3456	1/4" tubing - 1/4 NPT	BULK BAG OF 6
	3128	1/4" tubing - 1/8 NPT	BULK BAG OF 25
	3031	1/4" tubing - 1/4 NPT	
 Union T (Push-To-Connect)	3461	1/4" tubing	RETAIL PACK OF 1
	3453	1/4" tubing	BULK BAG OF 6
	3025	1/4" tubing	BULK BAG OF 25
 Male branch swivel T	3025	1/4" tubing - 1/4 NPT	BULK BAG OF 25
 Pressure switch	9016	1/8 NPT male, 90–120 PSI	RETAIL PACK OF 1
	9193	1/8 NPT male, 100–150 PSI	
 Pressure switch	9401	1/8 NPT male, 90–120 PSI	RETAIL PACK OF 1
	9402	1/8 NPT male, 110–145 PSI	
 Compressor check valve	3468	1/8 NPT	RETAIL PACK OF 1

	Name	Part	Description	Quantity
	Compressor T	3066	1/4" tubing - 1/8 NPT	RETAIL PACK OF 1
	Union	3466	1/4" tubing	RETAIL PACK OF 1
		3079	1/4" tubing	BULK BAG OF 10
		3114	1/4" – 3/8" tubing	
	Tubing cutter	9009	Cuts air line squarely and cleanly	RETAIL PACK OF 1
	Coil-Rite™ elbow fitting	3438	Shrader to Push-To-Connect	RETAIL PACK OF 1
	Coil-Rite™ straight fitting	3439	Shrader to Push-To-Connect	RETAIL PACK OF 1
	Inflation valve bracket	7560		RETAIL PACK OF 1
	Fuse tap kit	2526	The fuse tap kit provides an easy, low-impact method to connect the wire harness to the fuse box without splicing or soldering. Keeps the original circuit intact.	RETAIL PACK OF 1
	Extension hoses	9006	25-ft. extension hose	RETAIL PACK OF 1
		2311	25-ft. extension hose with gauge	


Helpful Tools

The scale shown below may be used to assist in identifying the correct NPT (National Standard Taper Pipe Thread) fitting. Thread sealant is applied to the tapered threads. If the fitting is removed, use Teflon™ tape during reinstallation to prevent air leaks.


SHOWN ACTUAL SIZE




1/2 NPT



3/8 NPT



1/4 NPT



1/8 NPT

NPT Size	Nominal outside diameter
1/2	0.840"
3/8	0.675"
1/4	0.540"

SERVICE PARTS


Name		Part	Description		
	Dealer fitting pack 1	2359	Includes 4 each: 1/4" union Ts, inflation valves, 1/4 NPT elbow fittings.		
	Dealer fitting pack 2	2360	Includes 4 each: 1/4" union Ts, inflation valves, 1/4 NPT elbow fittings. Includes 2 each: 1/4" unions, 1/4 NPT straight fittings.		
	Dealer fitting pack 3	2395	Includes 6 each: 1/4 NPT elbow fittings, inflation valves. Includes 2 each: Union Ts, 1/4 NPT straight fittings, union fittings. Also includes 100' of 1/4" air line tubing.		
	Dealer fitting pack 4	2567	Includes 4 each: 1/4" union Ts, inflation valves, 1/8 NPT straight fittings.		
	Ride-Rite™/Sport-Rite™ air line service kit	2012	Includes 18' of red 1/4" air line, two 1/4 NPT elbow fittings, one union T, and two inflation valves.		
	Air line tubing		Size	Length	Color
		9416	1/4"	30'	Red
		9145	1/4"	100'	Red
		9153	1/4"	30'	Black
		0006	Coil-Rite™ 90° tubing	18'	Blue
		0048	Coil-Rite™ straight tubing	18'	Blue

Expand your air supply capabilities in the field

Firestone offers a wide selection of air tanks ranging from 1/4 gallon to 20 gallons. These air tanks are coated internally and externally to resist corrosion. They are tested to SAE J10 compliance and are capable of 150 PSI maximum pressure. **All tanks are made in the USA.**


1/4 gallon air tank

9166

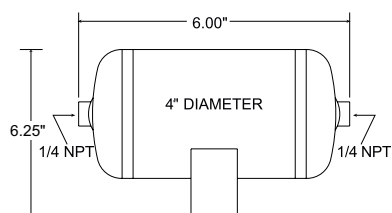


1 gallon air tanks

9125

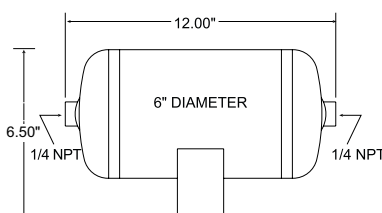


9244

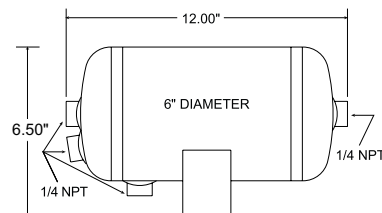


1/2 gallon air tank

9124

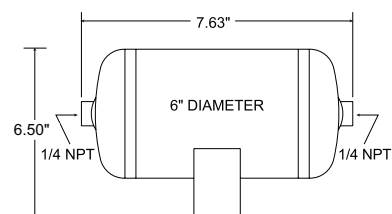


2 gallon air tanks

9420

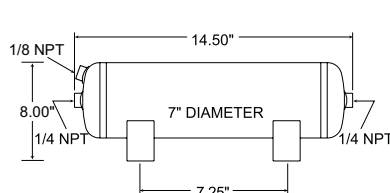


9126

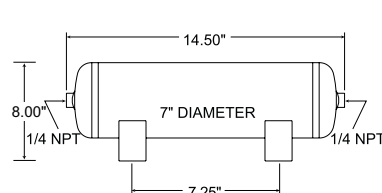


3 gallon air tanks


9127

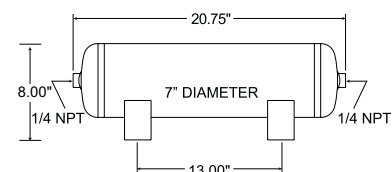


9148

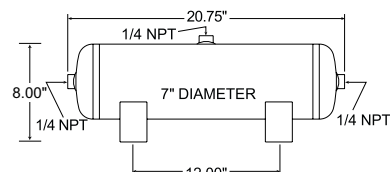


9227

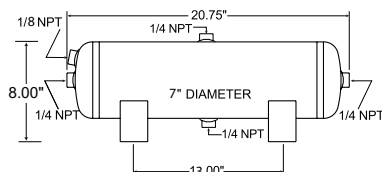


9154

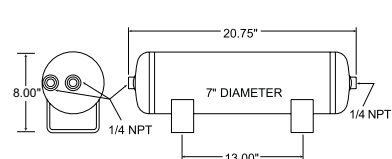

9229

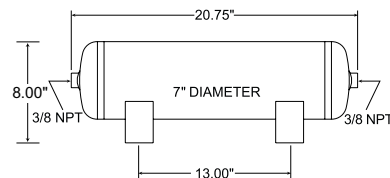


9245

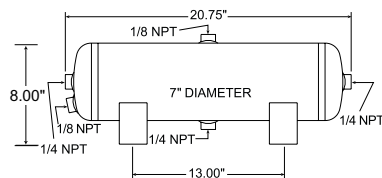


AIR TANKS

5 gallon air tanks


9191

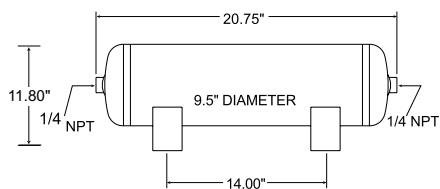


9231

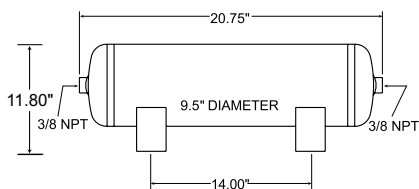


9242

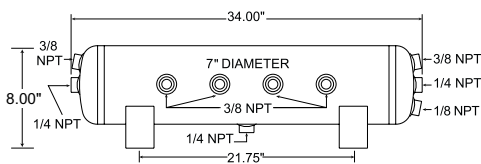


9243

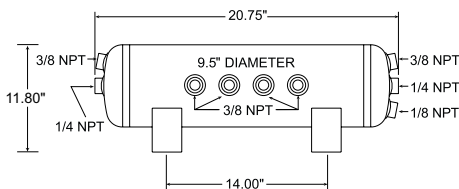

9246

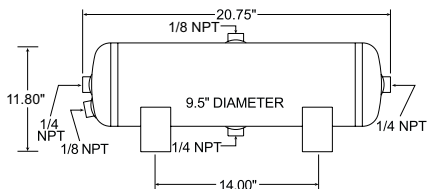


9248

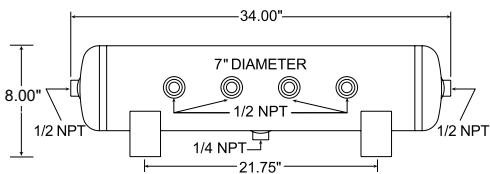

20 gallon air tank

9277

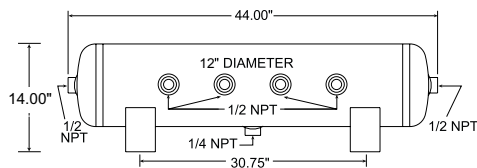

Helping you help your customers

With one of the strongest sales networks in the industry, Firestone stands behind every one of our dealers, helping you sell with solid marketing practices. Firestone has made a commitment to its dealers to provide national assistance through the use of an aggressive marketing campaign and a comprehensive web site.



Ride-Rite™ floor display

9975


20" wide x 60" tall pop-up display.



Ride-Rite™ part display

9999

18" w x 18.5" h (19.5 lbs.) display with plastic pocket and 25 brochures.



Ride-Rite™ banner

9982

Contact customer service at 800-888-0650 to order.



Counter mat

9988

Promote sales with our full color 16" x 20" counter mat. A great marketing piece to attract attention.



Ride-Rite™ decal

9372 - Full color

Use the popular 3" x 6" Ride-Rite™ decal on windows, tool boxes, or as counter giveaways. 25 per pack



Consumer brochure

8191

Learn in detail what Firestone air springs can do for your ride in our consumer brochure. 25 per pack (used in 9985 and 9999)



Mechanic's gloves

Small/Med. 9345

Large 9346

Packaged individually.

WARRANTY GUIDE

What's covered

Firestone Industrial Products Company's Ride-Rite™ kits, components, and accessories are warranted against defects in workmanship and materials. This only applies to Firestone manufactured light duty kits.*

What's not covered

This limited warranty does not cover service or labor charges, freight or customs charges, lost wages due to down-time, neglect, abuse, misuse, misapplications, improper installation, failure due to external conditions or interference, overloading or alterations to the product, wear and tear, if bought from eBay, Craigslist, or other non-dealer sources, or custom applications.*

What's the period of coverage*

RIDE-RITE™, SPORT-RITE™, COIL-RITE™ KITS	
Air Springs	Hardware & Brackets
Limited Lifetime	2 Years

AIR-RITE™ ACCESSORIES	
Bumpers, Hardware, Fittings & Air Line	
2 Years	
Air Compressor	
1-2 Years (depending on model, refer to the website for specifics)	

*Firestone reserves the right to change product components, specifications, and/or designs at any time for any reason without obligation to retrofit prior versions. Firestone supplies air springs to other manufacturers, including air, hitch, and other suspension companies. The air spring and component warranties for non-Firestone manufactured kits and systems are covered by the manufacturer of those products.

Ride-Rite™ Warranty Evaluation Guide

Firestone air springs are designed to provide years and thousands of miles of trouble-free service. The durability of Firestone air springs is such that they will often outlast other maintenance items on your suspension, such as bushings, shocks, and other components. Ride-Rite™ air springs are warranted to be free of material defects and/or workmanship for as long as the original purchaser owns the vehicle on which it was originally installed. The hardware and brackets which accompany the air spring are warranted for a period of twenty-four (24) months. This limited warranty begins on the original retail delivery date. Firestone may provide replacement parts if the hardware and/or brackets were determined by Firestone to be warrantable. All labor and incidental costs associated with replacing the defective air spring are the responsibility of the consumer.

Firestone offers a complete line of air springs, with products available for a variety of applications. Since each individual air spring is closely examined and pressure tested at the factory, the vast majority of warranty claims are found not to be defective; and failure typically occurs because of abuse caused by other problems associated with the suspension or a lack of sufficient air pressure.

The information on the following pages was developed to illustrate common types of failures that may occur and to assist you in determining the cause and corrective action required.

Firestone


Firestone Industrial Products

Web: riderite.com
Email: rrtech@fsip.com

If emailing, please include the following:

- Name
- Phone
- Address
- Vehicle Make/Model
- Kit part number, if known
- Where and when you purchased the kit
- Brief description of issue
- Photos are helpful to identify part numbers and failure mode. If you cannot provide photos, Firestone can provide a shipping label for you to return the parts with a copy of the retail receipt for inspection.


Product verification required; photos of claim can be used lieu of returning defective product.



Single
Convoluted



Tapered
Sleeve




Double
Convoluted



Coil-Rite™
Air Spring

Coverage

Firestone air springs are designed and built to the highest of standards and will provide years and thousands of miles of trouble-free service. Most failures are caused by improper application, installation, misuse, and abuse. The following examples are common failures that are **NOT covered under warranty**.

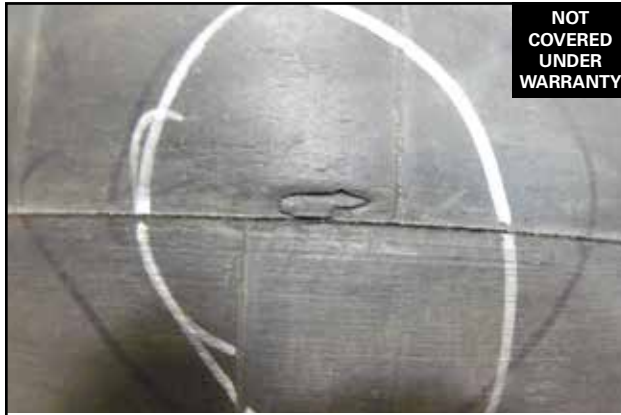

NOT
COVERED
UNDER
WARRANTY

Puncture

Rubber bellows close-up.

Appearance or Condition

- Irregular shaped cut in the bellows

Possible Causes

- Debris punctured the bellows
- Mounted too close to a sharp object



NOT
COVERED
UNDER
WARRANTY

Bent Alignment Pin

Convolved shown.

Appearance or Condition

- One side of alignment pin is pushed down toward the bead plate
- Marring or semicircular gouge in the top of the alignment pin
- Pin pushed in

Possible Causes

- Alignment pin was not installed into the alignment pin hole in the bracket
- Attachment hardware not tightened



NOT
COVERED
UNDER
WARRANTY

Abrasion

Convolved shown.

Appearance or Condition

- Hole rubbed into side of bellows or in area that rolls over piston (sleeve style)

Possible Causes

- Contacting a vehicle or other suspension component
- Inadequate air pressure
- Road debris
- Oversized tire contact
- Snow chain contact
- Inadequate tire to frame clearance



NOT
COVERED
UNDER
WARRANTY

Circumferential Cuts

Convolved shown.

Appearance or Condition

- Bellows cut or separated around the perimeter of bead plate or piston

Possible Causes

- Too much air pressure, over extended for long periods of time
- Bottoming out
- Air spring overextended
- Normal wear and tear over years of usage



NOT
COVERED
UNDER
WARRANTY

Bent or Broken Brackets & Bolts

Appearance or Condition

- Distorted shape
- Possible cracking or “tearing”

Possible Causes

- Not enough air pressure in the system for the load
- Overloading the vehicle/air springs
- Bottoming out



NOT
COVERED
UNDER
WARRANTY

Broken Piston

Appearance or Condition

- Cracked or broken piston

Possible Causes

- Road debris
- Not enough pressure in the system for the load
- Overloading the vehicle/air springs
- Installed height of air spring too short
- Bottoming out

Bottom of tapered sleeve shown (Sport-Rite™ application).

Bottoming Out

Appearance or Condition

- Bent brackets or beadplates
- Broken girdle hoop (convoluted parts), caps or pistons (sleeve parts)
- Cuts near the bead plates, caps, or pistons
- Leaking around blind nuts

Possible Causes

- Installation height is too low, resulting in air spring too short
- Not maintaining the minimum air pressure
- Not enough air pressure for the load
- Overloading the vehicle/air springs



Tapered sleeve shown.

NOT
COVERED
UNDER
WARRANTY



NOT
COVERED
UNDER
WARRANTY

Coil-Rite™ shown.

High Temperature / Over Inflation

Appearance or Condition

- Tear in the side of the part, material seems thin or “stretched”

Possible Causes

- Exposed to high temperature for long periods of time (too close to exhaust)
- Over inflation (see manual for max operating pressure)



NOT
COVERED
UNDER
WARRANTY

Cracked / Hard Bellows

Appearance or Condition

- Cracking in bellows around bead plates and caps or where the sleeve rolls over the piston
- Hard to the touch, no longer flexible

Possible Causes

- Exposed to high temperature for long periods of time
- Old air spring — Rubber ages and will wear out eventually; the air spring is not warrantable and needs to be replaced
- Normal appearance after product's end of life

Convoluted shown.

Coverage

Do not open or disassemble your compressor, or spray with WD-40, to troubleshoot an issue. The compressor images below are for reference only. **Do not take apart your compressor. This voids your warranty.** Check out riderite.com for more warranty information.

NOT
COVERED
UNDER
WARRANTY



Compressor Cylinder Body

Appearance or Condition

- Compressor will not start
- Compressor will not pump air


Possible Causes

- Compressor was submerged
- Compressor inlet has pulled in moisture from environment

Possible Solutions

- Replace compressor
- Snorkel air filter to a dry, dust free location (max. 6ft.)

NOT
COVERED
UNDER
WARRANTY

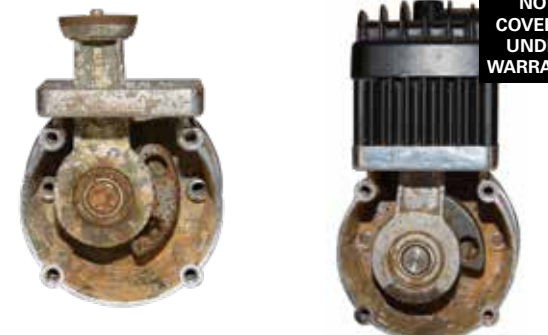

Crank and Rod

Appearance or Condition

- Compressor will not start
- Compressor will not pump air

Possible Causes

- Compressor was submerged
- Compressor inlet pulled in moisture from environment

Possible Solutions

- Replace compressor
- Snorkel air filter to a dry, dust free location (max. 6ft.)

NOT
COVERED
UNDER
WARRANTY



Inlet Plate

Appearance or Condition

- Rust around threads of inlet port
- Compressor will not pump air
- Compressor runs at high current (blows fuses)

Possible Causes

- Compressor was submerged
- Air filter assembly was not installed properly

Possible Solutions

- Replace compressor
- Snorkel air filter to a dry, dust free location (max 6ft)

COVERED
UNDER
WARRANTY



Brushes / End Plate / Motor Housing

Appearance or Condition

- Compressor will not start

Possible Causes

- Compressor was submerged
- Compressor has stuck brushes

Possible Solutions

- Lightly tap on compressor motor housing farthest from compressor head
- Replace compressor

TECHNICAL TIPS

Air spring alignment

Air spring alignment is important to the operation of your air spring kit. Upon installation, visually align the air spring. Most kits allow for adjustment of the upper and lower brackets to assist in making the air springs vertical. In most instances, position the upper and lower brackets so that they are parallel. Remember to maintain proper design height. Refer to the installation manual for kit-specific procedures.

Push-To-Connect fittings

Firestone's push-to-connect air fittings are extremely easy to use. Once the length of the air line has been selected to span the distance from the air springs to the inflation valves, simply use a sharp knife or tube cutter (9009) to cut the air line as square as possible (Do NOT use side cutters or other devices that may smash the end of the air line). Then, push the air line into the fitting as far as possible.

Air spring pressure

Never run the air spring under the minimum recommended pressure. Never exceed the maximum recommended pressure.

Heat sources

Make sure there is at least 6" of clearance between the air spring and the nearest heat source. Kits for vehicles with less than this clearance have a heat shield included. Our kits are designed to work around factory exhaust systems. Aftermarket systems with larger tubes may cause interference or put heat too close to the air spring, which will damage the rubber.

Air spring clearance

After installing your air spring kit, make sure you have at least 1/2" of clearance around the entire air spring when inflated. A good rule of thumb is to use the thickness of your hand and feel around the entire air spring. If your hand comes in contact with anything on the vehicle, you may have an interference issue. If the object can be moved, relocate it. If the object cannot be moved, contact Firestone for further assistance. No part of the air spring kit (bellows, brackets, hardware) should rub on any lines (fuel, brake, electric) or contact anything but the mounting surfaces designed to support the brackets.

Air Accessory Systems

Firestone offers a wide range of Air Accessory Systems for all of your air spring requirements. Some quick tips that apply to all Firestone air accessories:

- 1.) All compressors are direct drive units (NO oil or belts). This means the compressor can be mounted in any position without detriment to the compressor.
- 2.) In systems using tanks, when connecting the compressor to a positive wire on the vehicle, make sure the wire is ignition activated. This will eliminate the possibility of the compressor running while the vehicle is turned off, which can drain your battery.
- 3.) The compressor can be mounted under the hood or on the frame rail behind a cross member. In order to allow enough airflow to the compressor, place the unit in a well-protected area free from debris and large amounts of water.

FREQUENTLY ASKED QUESTIONS

Q: Where can I buy your product?

A: Most good truck and RV accessory shops carry our product. You can also find local retailers in the "Where To Buy" section of www.riderite.com.

Q: How do I remove my air line from the push-to-connect fitting without damaging the fitting?

A: Push the air line toward the body of the fitting. This will also force the collet, or collar, of the air fitting toward the fitting body. Hold the collet against the fitting, using a 5/16" open end wrench, and then pull the air line out after the collet releases the air line.

Q: Will this raise or lower the ride height of my truck?

A: No, the Ride-Rite™ kits are designed to work in the original suspension height and configuration. Changes to height can hurt performance or allow the parts to be stretched or compressed beyond their capability. The result is a premature failure.

Q: Does this allow my truck to carry more weight?

A: Absolutely not. Only the vehicle manufacturer can set the GVWR. Even with the air springs, you have the same brakes, axles, bearings, and frame stiffness, which in part determines the vehicle's load capability. The Ride-Rite™ air springs simply allow you to carry the maximum capacity of your truck more comfortably and without suspension sag (and the poor handling that comes with it).

Q: How long will the kit last?

A: The life expectancy depends on a variety of factors, including heat, environmental conditions, and how hard you are using your vehicle. Due to our superior construction and rubber compounds, which are the same as we use on our Airide™ commercial vehicle air springs, it is not unusual to see the Firestone air springs last for 4 or 5 years. When they weather-check (or dry-rot), like a tire, they need to be replaced.

Q: Will this make my rough ride go away?

A: When the vehicle is loaded, the air helper springs help the existing suspension carry the load and improve the ride a great deal. With the minimum pressure in an unloaded vehicle, there will be no change to the ride.

Q: Will it work for a lifted vehicle?

A: We have lifted kits available for some applications. Please see page 9 for our lifted applications.

Q: My system loses over 5 pounds of air a week. How do I find the leak?

A: Mix a solution of soap and water (about 1/5 liquid soap to 4/5 water) and spray it on the air line fittings, air spring, and compressor body and head (if you have an air compressor). If the fittings are leaking at the threads, tighten them or apply thread sealant. If the fitting is leaking at the air line, remove the air line, re-cut it squarely, and re-insert. If the air spring is leaking, send a picture to rrtech@fsip.com to see if it is covered under warranty.

Q: Where can I buy air line or fittings?

A: Commercial vehicle shops carry DOT rated tubing or you can order them from your local retailer. Part numbers are on pages 39-41.

Q: Can I add a "T" fitting to inflate both air springs equally?

A: Yes, but adding a "T" fitting will not allow you to level side-to-side and will allow air to go from one side to the other, which sacrifices some of the stability that the Ride-Rite™ kit adds. Firestone does not include "T" fittings in most kits for this reason.

Q: Do I have to add an air compressor?

A: No, the kit comes with 2 inflation valves, one for each side of the vehicle. The inflation valves are the same as are used on a tire. When you check your tires monthly, check your air spring pressure as well. You can add air using any means you would use to inflate your tires. Your local Firestone Tire and Service center provides free compressed air to their customers.

Q: Do I have to mount my compressor flat?

A: No, Firestone compressors are oil-less and can be mounted in any direction.

Q: Will putting the vehicle up on a hoist or a two post lift hurt the springs?

A: No. Firestone air springs use technology from our heavy truck Airide™ springs and can withstand thousands of pounds of pulling force without damage.

Q: Are Firestone Ride-Rite™ air spring still under warranty if I have a custom application?

A: It depends on the failure mode. If it's a manufacturing defect, we'll stand behind our product. If it's due to misuse or application, such as over-extended, rubbing other parts, too much pressure, or other suspension design or fabrication issues, then we can't cover the air spring.

Q: Do I need to add a dryer to my compressor kit?

A: In our experience, intermittent use of our systems and how they're operated do not necessitate an air dryer. We recommend building loops into the air lines to act as traps for moisture so water does not flow back into the compressor head. See the installation guide for examples.

Q: Can I buy directly from Firestone?

A: No, we do not sell direct. For retail locations near you, please visit www.riderite.com and click Where To Buy.

Q: What happens if I overinflate an air spring by one PSI?

A: Generally, overinflating by one PSI will not damage your air springs.

Q: Is it okay to drive loaded at 100 PSI?

A: Yes, our air springs are designed and tested to withstand the roughest conditions. They will withstand pressure spikes they will see from driving over large bumps and uneven terrain.

These are the most frequently asked questions. For additional information, please consult the installation instructions on the web site, operator's guide, or visit riderite.com.

Firestone

TOW LIKE A PRO



**FIRESTONE INDUSTRIAL
PRODUCTS CO., LLC**
Nashville, TN

riderite.com

US Manufacturing Facilities:
Dyersburg, TN - Williamsburg, KY



AIRBAG MAN
Queensland, Australia

airbagman.com.au

Imported by:
Air Springs Supply Pty Ltd



DRIVERITE
Dublin, Ireland

driveriteltd.com

Follow us online:



Firestone Ride-Rite



/FirestoneIP

We are proud members and support the efforts of the following trade associations:

